

# Measurements of the propagation of UHF radio waves on an underground railway train

Zhang, Yue Ping; Jiang, Z. R.; Ng, Tung Sang; Sheng, J. H.

2000

Zhang, Y. P., Jiang, Z. R., Ng, T. S., & Sheng, J. H. (2000). Measurements of the propagation of UHF radio waves on an underground railway train. IEEE Transactions on Vehicular Technology. 49(4), 1342-1347.

<https://hdl.handle.net/10356/91427>

<https://doi.org/10.1109/25.875255>

---

© 2000 IEEE. Personal use of this material is permitted. However, permission to reprint/republish this material for advertising or promotional purposes or for creating new collective works for resale or redistribution to servers or lists, or to reuse any copyrighted component of this work in other works must be obtained from the IEEE. This material is presented to ensure timely dissemination of scholarly and technical work. Copyright and all rights therein are retained by authors or by other copyright holders. All persons copying this information are expected to adhere to the terms and constraints invoked by each author's copyright. In most cases, these works may not be reposted without the explicit permission of the copyright holder. <http://www.ieee.org/portal/site> This material is presented to ensure timely dissemination of scholarly and technical work. Copyright and all rights therein are retained by authors or by other copyright holders. All persons copying this information are expected to adhere to the terms and constraints invoked by each author's copyright. In most cases, these works may not be reposted without the explicit permission of the copyright holder.

# Measurements of the Propagation of UHF Radio Waves on an Underground Railway Train

Y. P. Zhang, Z. R. Jiang, T. S. Ng, *Senior Member, IEEE*, and J. H. Sheng

**Abstract**—Measurements of the natural propagation of UHF radio waves on an underground train are reported. Of prime interest are the natural propagation attenuation and the median signal level behavior. The propagation attenuation rates or the median signal level behaviors are found to correlate with the train carriages and frequency. On the front carriage, the propagation attenuation rate is 54 dB/100 m at 465 MHz and reduced to 21 dB/100 m at 820 MHz. However, on the rear carriage, it becomes 14.8 dB/100 m at 465 MHz and 7.8 dB/100 m at 820 MHz. It is shown that higher frequency is beneficial to the natural propagation and the train body greatly affects the natural propagation. Furthermore, the values of the path loss exponent are also given.

**Index Terms**—Mobile radio propagation, underground railways.

## I. INTRODUCTION

MOBILE communications for underground railway trains are currently realized by the guided propagation of radio waves using the approach of leaky feeder [1]. They are also likely to be implemented by the natural propagation of radio waves utilizing the method of antenna [2]. Of the two, it is the latter that has recently drawn attention. Measurements of the natural propagation of radio waves at 2.5 GHz in an empty underground railway tunnel have been reported [3]. It is shown that the propagation attenuation is quite small in the platform and the straight section of the tunnel. However, the natural propagation undergoes great attenuation in the curved section of the tunnel and a sharp drop in the signal level occurs when the line-of-sight propagation path is obstructed due to the tunnel curvature. Such measurements actually provide very limited information on radio propagation characteristics in underground railway tunnels because the effects of the train on the natural propagation have not been considered. A train is a major scatter in an underground railway tunnel. It will severely block the natural propagation. On the other hand, a theoretical model based on ray-optical approach has been proposed to determine the time-variant radio links in high-speed train tunnels [4]. However, no experimental validation of the model has been made. In this paper, we contribute to the measurements of the nat-

ural propagation losses of UHF radio waves on an underground moving train. Specifically, it presents results of measurements taken at 465 and 820 MHz. We first describe the experimental conditions and the measurement system. Secondly, we analyze and discuss the experimental results, and finally, we make conclusion.

## II. MEASUREMENTS

The measurements were made on a train moving between Stations Xizhimen and Chegongzhuang of Beijing Underground Railway. The train has six carriages. The length of each carriage is 19 m. The internal and external dimensions of the carriage are 2.65 m and 2.95 m wide, and 2.1 m and 3.6 m high, respectively. There are eight glass windows on each side of the carriage. A window has the length of 1.17 m and the width of 0.94 m. The ratio of the window area to the whole side area is 0.22 to 1. The quasi-straight arched tunnel between the two stations has the floor width of 5.8 m, the maximum height of 4 m, and the length of 980 m. It takes about 1 min for the train to travel.

The measurement system consists of a transmitting unit, a receiving unit, and a data acquisition unit. The transmitter output was 8 W at 465 MHz and 34 W at 820 MHz. The sensitivity of the R/S ESV receiver was  $-117$  dBm. The gain of the transmitting antenna was 5 dBi at 465 MHz and 9 dBi at 820 MHz, while the gain of the receiving antenna was 3.5 dBi at 465 MHz and 5 dBi at 820 MHz. The data acquisition unit was set to log received signal level to a floppy disk every  $7 \times 10^{-6}$  s. When the measurements were being made, the transmitting unit was on the edge of the platform of Station Xizhimen, the receiving and the data acquisition units housed on a trolley was on the train. The radio channel was first excited by the vertically polarized transmitting antenna at the height of 1 m above the platform floor, and then was sounded by the vertically polarized receiving antenna at the height of 1 m above the train floor. Fig. 1 shows the measurement setup with respect to the train movement.

## III. ANALYSIS AND RESULTS

The median signal level over a distance of  $40\lambda$  was computed at  $40\lambda$  intervals for each measurement run. The propagation attenuation rates were calculated with the median signal levels between the maximum and a threshold. Since the receiver passed by the transmitter as the train moved, the maximum would occur at the shortest distance between the transmitter and the receiver. The threshold was determined after careful observation of the propagation attenuation of the measured results. For most of

Manuscript received October 14, 1998; revised August 18, 1999. This work was supported in part by the National Natural Science Foundation of China, under Grant 69672030, and in part by Natural Science Foundation of Shanxi Province, PRC.

Y. P. Zhang is with the School of Electrical and Electronic Engineering, Nanyang Technological University, Singapore 639798.

Z. R. Jiang is with the Department of Communications and Control Engineering, Northern JiaoTong University, Beijing, China.

T. S. Ng is with the Department of Electrical and Electronic Engineering, the University of Hong Kong, HKSAR, China.

J. H. Sheng is with the School of Information Engineering, Taiyuan University of Science and Technology, Shanxi, China.

Publisher Item Identifier S 0018-9545(00)04844-1.

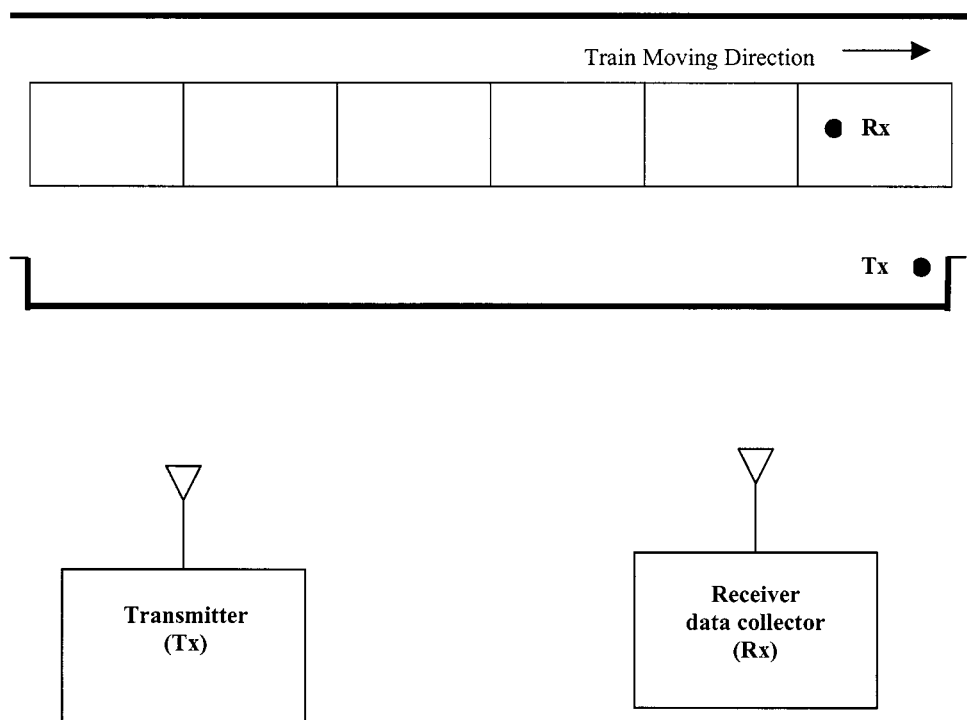


Fig. 1. Measurement setup with respect to the train movement.

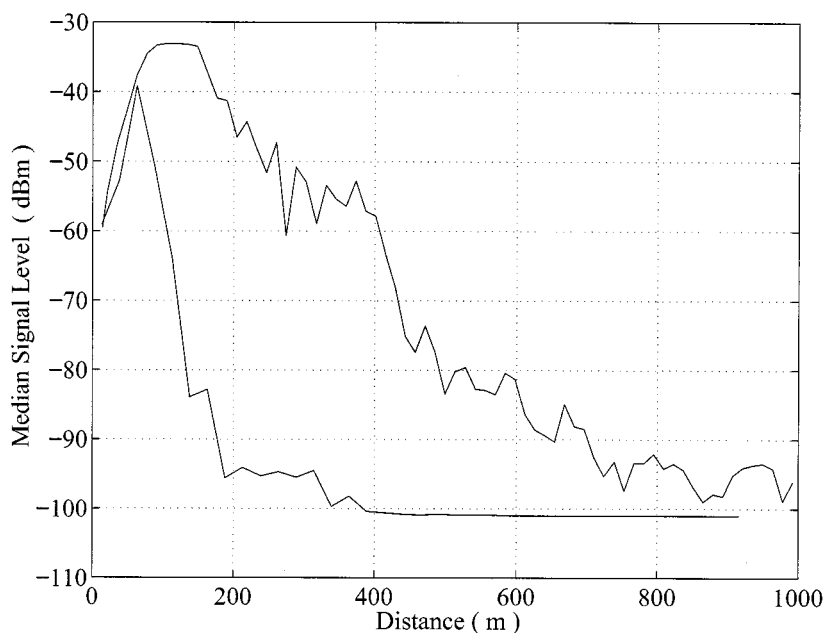


Fig. 2. Median signal levels on the front and rear carriages at 820 MHz against the distance that the train travels.

them, the threshold was at  $-100$  dBm, that is, the median signal levels smaller than  $-100$  dBm were excluded.

Fig. 2 shows the median signal levels at 820 MHz on the front and rear carriages against the distance that the train travels. It is evident that the median signal on the front carriage is much weaker and more attenuated as compared with that on the rear carriage. For instance, at the separation distance of 200 m between the transmitter and the receiver, the

median signal level is  $-47.0$  dBm on the rear carriage and  $-94.0$  dBm on the front carriage. The weaker median signal level on the front carriage is due to more severe shadowing effect. The propagation attenuation rate is 21 dB/100 m with the standard deviation of 9.84 dB for the receiver on the front carriage and reduced to 7.8 dB/100 m with the standard deviation of 6.55 dB for the receiver on the rear carriage. Curves in Fig. 2 are two extreme examples. They set the

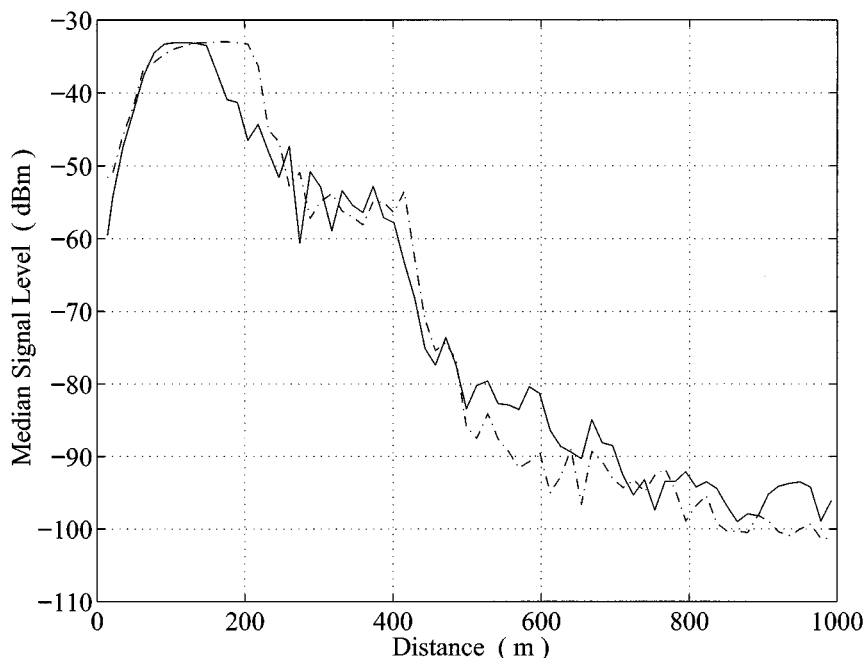


Fig. 3. Median signal levels on the rear carriage at 820 MHz against the distance that the train travels.

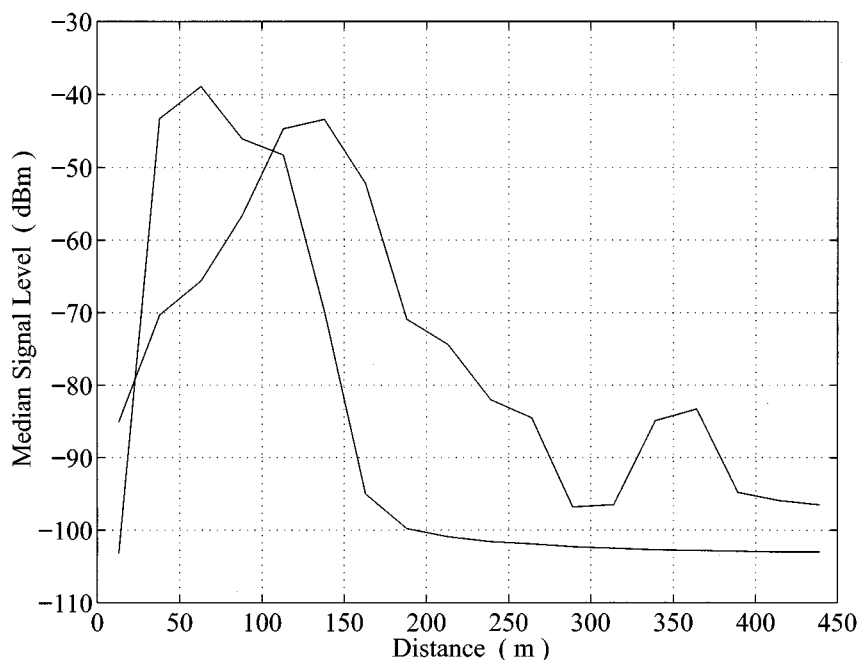


Fig. 4. Median signal levels on the front and rear carriages at 465 MHz against the distance that the train travels.

lower and upper bounds for the median level behavior and the natural propagation attenuation of 820 MHz radio waves on the moving underground train. They also indicate that the natural propagation is correlated with the train carriages. The more carriages are between the transmitter and the receiver, the higher propagation losses are. Here it is worthwhile mentioning that the natural propagation loss at 820 MHz due to this tunnel itself is 3.24 dB/100 m. Obviously, the existence of the train greatly increases the natural propagation loss.

Fig. 3 illustrates the median signal levels at 820 MHz on the rear carriage against the distance that the train travels. Continuous and discontinuous curves represent the median signal levels for the cases of the receiver being relatively stationary and in motion to the train, respectively. They simulate the two states of passengers using cellular phones on underground railway trains. It can be seen that there are no much differences in the median signal level behavior and the natural propagation attenuation for both cases. This is expected since the speed of the

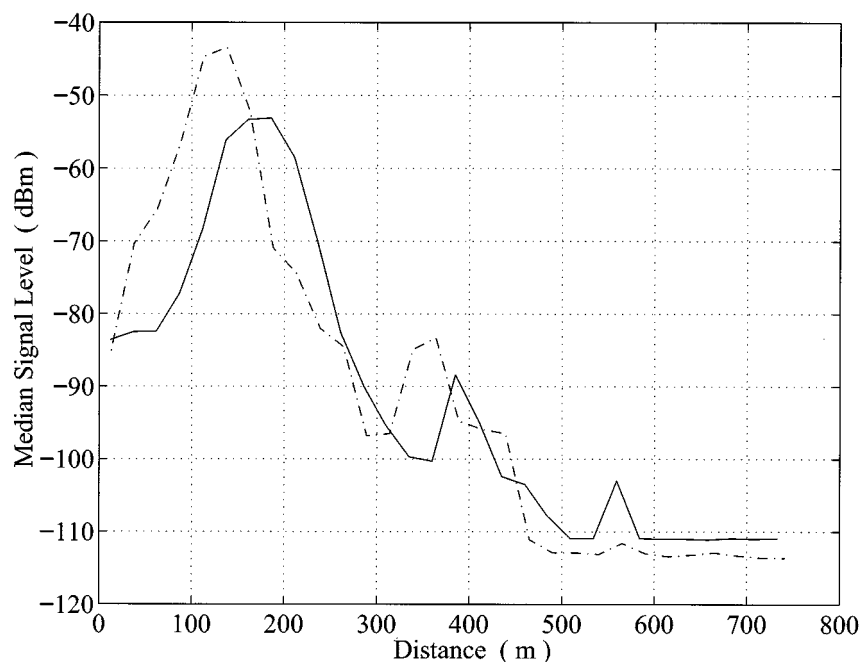


Fig. 5. Median signal levels on the rear carriage along the distance at 465 MHz against the distance that the train travels.

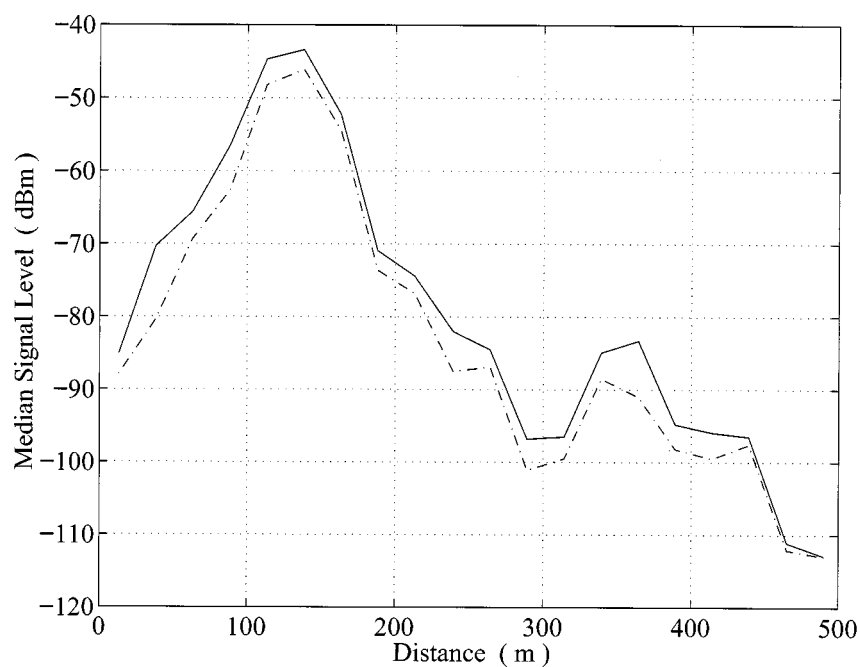


Fig. 6. The 50 and 90 percentile signal levels on the rear carriages at 465 MHz against the distance that the train travels

receiver to the train is much slower than that of the train to the transmitter.

Figs. 4 and 5 display the corresponding measured results at 465 MHz. It is interesting to note that the natural propagation suffers high propagation loss. The natural propagation loss due to this tunnel itself at 465 MHz is 10.1 dB/100 m. The propagation attenuation rates increase to 54 dB/100 m with the standard deviation 7.1 dB for the receiver on the front carriage and to 14.8 dB/100 m with the standard deviation of 8.9 dB for the re-

ceiver on the rear carriages, respectively. The comparison of the results at 465 MHz with those at 820 MHz shows the higher frequency yields more fluctuations in the median signal levels and lower losses to the natural propagation.

Figs. 6 and 7 show another examples of the measurements at 465 MHz and 820 MHz, respectively. They were measured on the rear carriage. Continuous and discontinuous curves represent the 50 and 90 percentile signal levels, respectively. The percentiles are a reflection of the distribution of the signal levels

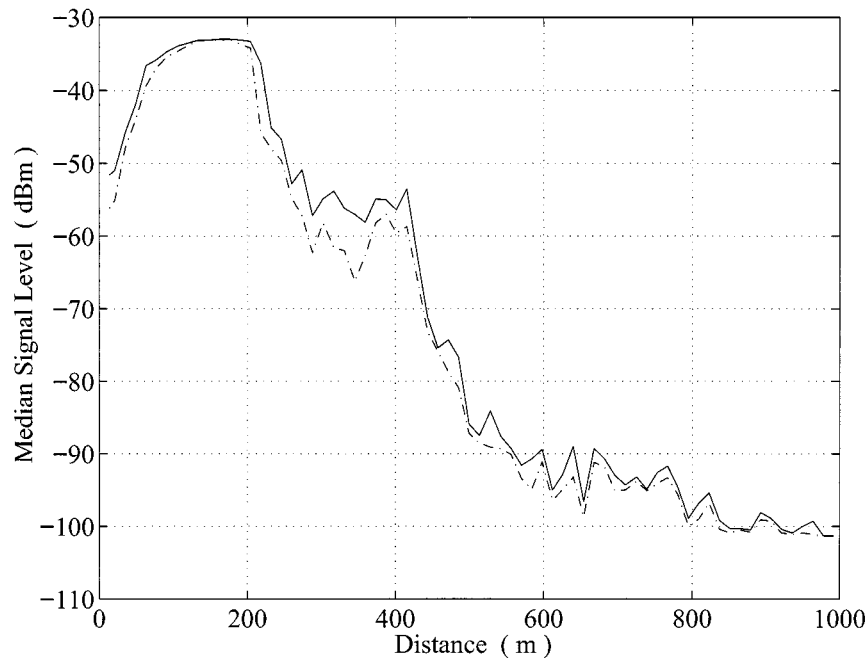


Fig. 7. The 50 and 90 percentile signal levels on the rear carriages at 820 MHz against the distance that the train travels.

TABLE I  
PATH LOSS EXPONENT AND STANDARD DEVIATION

Frequency (MHz)	Exponent (n)	Standard deviation (dB)	Carriage
465	12.45	9.46	front
	9.72	7.15	rear
820	8.58	6.40	front
	8.17	4.58	rear

and give some indication of the spread of the signal levels. This is useful to estimate the coverage and co-channel interference.

Furthermore, we also developed a path loss exponent model from the data. The values of the loss exponent are found from the linear regression analysis. They are given in Table I together with the standard deviation.

#### IV. CONCLUSION

The measurements of the natural propagation of radio waves at 465 and 820 MHz on an underground train have been presented. The path loss exponent model has been developed. The propagation attenuation rates at both frequencies on the train front and rear carriages have been obtained. They are 54 dB/100 m and 14.8 dB/100 m at 465 MHz and reduced to 21 dB/100 m and 7.8 dB/100 m at 820 MHz. The propagation attenuation rates are correlated with the train carriages and frequency. The train body greatly affects the natural propagation of UHF radio waves. Higher frequency is beneficial to the natural propagation.

#### REFERENCES

- [1] K. H. Yip, "Digital mobile radio communications in Hong Kong Mass Transit Railway," unpublished.
- [2] R. J. Jakubowski, "Results of distributed antenna and leaky feeder systems tests at 800 MHz in the Washington D.C. metro system tunnels," in *Proc. IEEE Veh. Technol. Conf.*, 1994, pp. 1113–1116.
- [3] S. Shinozaki, M. Wada, A. Teranishi, H. Furukawa, and Y. Akaiwa, "Radio propagation characteristics in subway platform and tunnel in 2.5 GHz band," in *Proc. 1995 IEEE Int. Symp. Personal, Indoor, and Mobile Radio Commun.*, pp. 1175–1179.
- [4] D. J. Cichon, T. C. Beeker, and W. Wiesbeek, "Determination of time-variant radio links in high-speed train tunnels by ray-optical modeling," in *Proc. IEEE Antennas and Propagation Society Int. Symp.*, 1995, pp. 508–511.



**Y. P. Zhang** received the B.Eng. and M.Eng. degrees from the Taiyuan University of Science and Technology, Shanxi, China, and the Ph.D. degree from the Chinese University of Hong Kong, Hong Kong, in 1982, 1987, and 1995, respectively.

He was with the Shanxi Electronic Industry Bureau, the University of Liverpool, U.K., and City University of Hong Kong. He taught at Shanxi Institute of Mining and Technology, Taiyuan University of Science and Technology, and the University of Hong Kong. He is now a Lecturer with School of Electrical and Electronic Engineering, Nanyang Technological University, Singapore. His research interests are in the areas of propagation of radio waves, characterization of radio channels, small and smart antennas, and sub-surface intrinsically safety digital radio communication systems.

**Z. R. Jiang** photograph and biography not available at the time of publication.



**T. S. Ng** (S'74–M'78–SM'90) received the B.Sc. from Hong Kong University in 1972, and the M.Eng. and Ph.D. degrees from the University of Newcastle, Australia, in 1974 and 1977, all in electrical engineering.

He worked for BHP Steel International and The University of Wollongong, Australia, after graduation for 14 years and returned to Hong Kong in 1991, taking up the position of Professor and Chair of Electronic Engineering. His current research interests include mobile communication systems, spread spectrum techniques, CDMA, and digital signal processing. He has published over 170 International journal and conference papers. He is currently a Regional Editor of the *International Journal-Engineering Applications of Artificial Intelligence* (Pergamon Press).

Dr. Ng is a Fellow of the IEE, HKIE, and IEAust. He was the General Chair of ISCAS'97 and is currently VP-Region 10 of IEEE CAS Society. He is also an Executive Committee Member and a Board Member of the IEE Informatics Divisional Board. He was awarded the Honorary Doctor of Engineering Degree by the University of Newcastle in August 1997 for his services to higher education generally and to engineering education specifically.

**J. H. Sheng** photograph and biography not available at the time of publication.