

This document is downloaded from DR-NTU, Nanyang Technological University Library, Singapore.

Title	64 Core ultra dense multicore fiber design for optical fronthaul systems
Author(s)	Li, Borui; Tang, Ming; Huo, Liang; Deng, Lei; Fu, Songnian; Shum, Perry Ping
Citation	Li, B., Tang, M., Huo, L., Deng, L., Fu, S., & Shum, P. P. (2016). 64 Core ultra dense multicore fiber design for optical fronthaul systems. Advanced Photonics Congress 2016 (IPR, NOMA, Sensors, Networks, SPPCom, SOF), SoM2F.2-. doi:10.1364/SOF.2016.SoM2F.2
Date	2016
URL	http://hdl.handle.net/10220/47484
Rights	© 2016 Optical Society of America. All rights reserved. This paper was published in Advanced Photonics Congress 2016 (IPR, NOMA, Sensors, Networks, SPPCom, SOF) and is made available with permission of Optical Society of America.

64 Core Ultra Dense Multicore Fiber Design for Optical Fronthaul Systems

Borui Li¹, Ming Tang^{1*}, Liang Huo¹, Lei Deng¹, Songnian Fu¹, Perry Ping Shum²

1 Next Generation Internet Access National Engineering Laboratory (NGIA), School of Optics and Electronics Information, Huazhong University of Science and Technology (HUST), 1037 Luoyu Road, Wuhan, 430074, China.

2 School of EEE, Nanyang Technological University, 50 Nanyang Avenue, Singapore 639798, Singapore.

Author e-mail address: tangming@mail.hust.edu.cn

Abstract: to make the most of spatial efficiency, we design 64-core trench-assisted multi-core fiber with the maximum crosstalk less than -14dB/20km, which is appropriate for the optical wireless fronthaul systems with inherent MIMO function.

OCIS codes: (060.0060) Fiber optics and optical communications; (060.2280) Fiber design and fabrication;

1. Introduction

Multicore fiber (MCF) is being intensely investigated from the access network to the long haul transmission systems [1, 2]. In view of enhancing capacity, high density MCF is always preferable and now 31-core high density single mode MCF has been realized [3]. While, researchers are sparing no efforts to optimize the index profile to suppress the crosstalk, to avoid the complex multiple input multiple output (MIMO) mitigation algorithms. It seems that increasing more cores is irreconcilable with suppressing the crosstalk.

In addition, to deal with a huge growth of mobile services, cloud radio access network (C-RAN) is proposed, requiring the introduction of optical fronthaul segment for remote feeding from central office to different antennas, featuring inherent MIMO technique per sector [4]. MCF has great advantages in future 5G wireless C-RAN architecture by serving a number of users simultaneously. It has been investigated that the inter-core crosstalk can be tolerated as high as -10dB/20km in the MIMO-OFDM-OQAM radio over MCF system [5]. Therefore, the space efficiency of MCF can be made the best of in optical fronthaul system through structure optimization.

2. Results and conclusions

Finite element method (FEM) is used for MCF design, and there are three important issues in such design. The first one is to suppress the inter-core crosstalk, and we choose the heterogeneous core with the trench-assisted index profile. Although the core pitch is only 18 μ m, the crosstalk can still be in target because when the bending radius is larger than the threshold bending radius, the adjacent cores are no longer in the phase-matching region and the crosstalk is suppressed greatly [6]. The second issue is the cutoff wavelength lengthen due to the trench existence [7]. To solve this problem, each core is enclosed with 4 cores but not 6 cores. The third issue is the excess loss of the outer cores. We set the cladding diameter to 260 μ m, with the failure probability of 10^{-6} at the proof of level 1% with the bending radius 30 mm [8]. Furthermore, the outer cladding thickness is set to 30 μ m and the excess loss can be lower than 0.001 dB/km with the effective area far less than 80 μ m². [9]

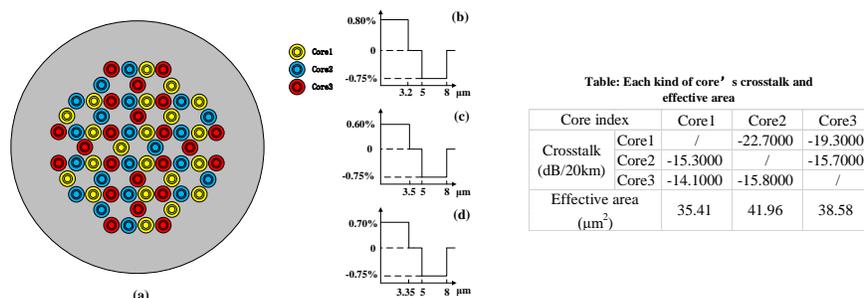


Fig. 1. (a) Cross section view of 64-core MCF and refractive index profile of (b) core1, (c) core2 and (d) core3; Inset: properties of MCF.

In conclusion, we have designed a 64 core ultra-dense MCF for the potential application in the optical fronthaul systems to support a higher density of radio-access points in 5G cellular system.

3. References

- [1] B. Li, et al., *Opt. Express*, 23, 10997-11006, 2015.
- [2] A. Turukhin, et al., in *OFC Conference*, paper Th4C.1, 2016.
- [3] K. Takenaga, et al., in *OFC Conference*, paper W1F.1, 2016.
- [4] A. Pizzinat et al., *J. Lightwave Technol.*, 33, 1077-1083, 2015.
- [5] J. He, et al., *Optics Express*, in review, 2016.
- [6] J. Tu, et al., *J. Lightwave Technol.*, 31, 2590-2598, 2013.
- [7] K. Takenaga, et al., in *OFC Conference*, paper OWJ4, 2011.
- [8] K. Saitoh, in *OFC Conference*, paper Th4C.1, 2015.
- [9] J. Tu, et al., *Optics Express*, 22, 15157-15170, 2012.